


Mobile Tablet Preliminary Specifications

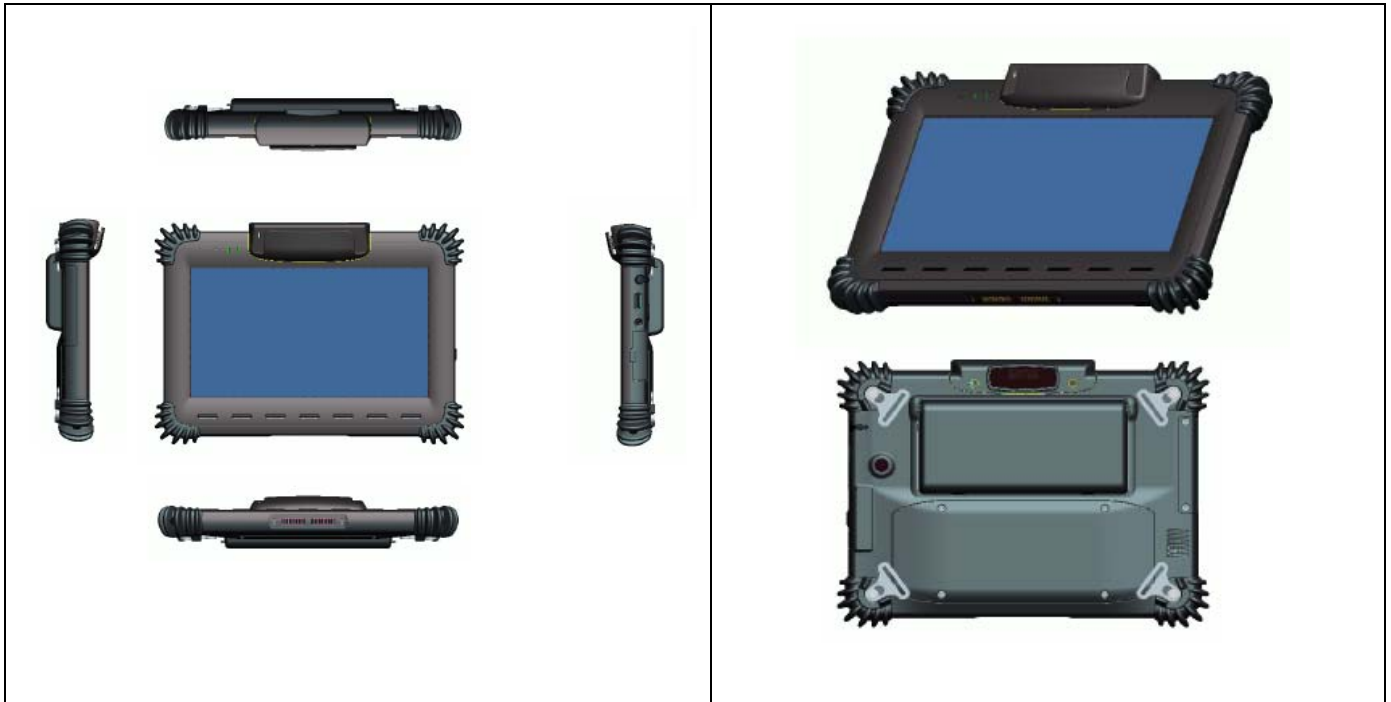

WebDT390	
Process	Intel® Atom™ processor Z530 1.6GHz
SCH	Poulsbo XL
Display	8.9" TFT Type LCD ; Outdoor-Viewable option
Resolution	1024x600, SWVGA
Memory	DDR2 533MHz 2GB
Storage Options	ADM 1GB~4GB
	SSD 32GB~64GB
	HDD 1.8" 60GB (PATA)
Integrated Module Options	Bluetooth
	MSR
	2D Scanner module
	WiFi (PCIe interface) IEEE802.11 a/b/g/n
	3G
	GPS
	RFID
Operation System	Microsoft Windows XP Embedded
	Microsoft XP Pro
	WinCE 6.0
	Linux

Input/Output	Stylus non-electronic tip	
	Microphone	
	Touch Panel	Multi-touch (USB interface)
		Multi-touch + GFG
		Multi-touch + GFG + LR
	Video Camera 3 mega pixel, CMOS with auto focus	
	Speaker	
	Headphone Jack	
	DC-in Jack	
USB *2; USB host 2.0		
Cradle interface	Ethernet, VGA, USB *2 and charging	
Buttons	Power button *1, Front buttons *7, Trigger button *1	
Indicator	1 Power/ Battery status LED ,1 WLAN active LED and 1 MSR active LED	
AC to DC Adapter	Input 100 ~ 240 V AC; Output 12V, DC@3.5A	
CMOS Battery	36 mAh	
Internal Battery	Rechargeable Li-Ion battery 2S2P ; 7.4V / 2200mAh	
Internal Battery (Optional)	Rechargeable Li-Ion battery 2S2P ; 7.4V / 3760mAh	
External	Rechargeable Li-Ion battery 2S2P ; 7.4V / 3760mAh	
Certification & Regulation	Safety : UL Listed, CE	
	EMC : FCC Part 15B-Class B	
	Radio : FCC Part 15.247	
	RoHS compliant	
Dimensions	256.12x196.12x23 (mm)	
Environment	IP54	

* This Specification is proprietary information for the sole use of its intended recipient. Please do not disclose it in any way.